

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:





- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2010HR-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green

9.Ordering Information & Dimensions


PIN	DIM (mm)	
	A	B
2	4.4	2.0
3	6.4	4.0
4	8.4	6.0
5	10.4	8.0
6	12.4	10.0
7	14.4	12.0
8	16.4	14.0
9	18.4	16.0
10	20.4	18.0

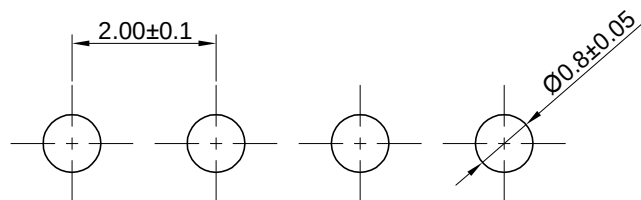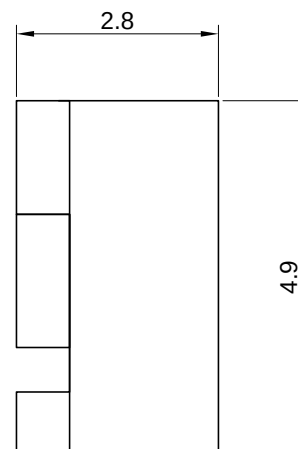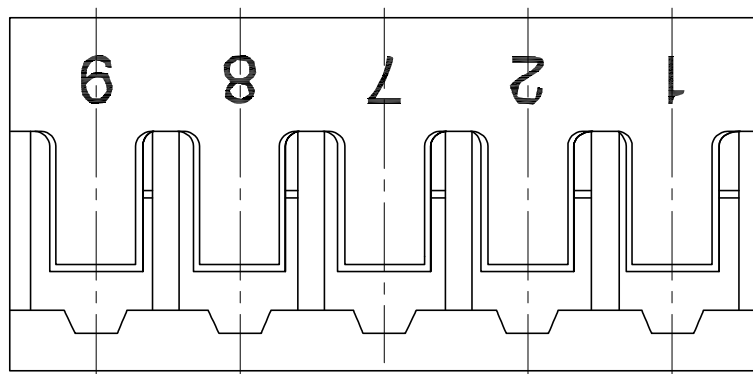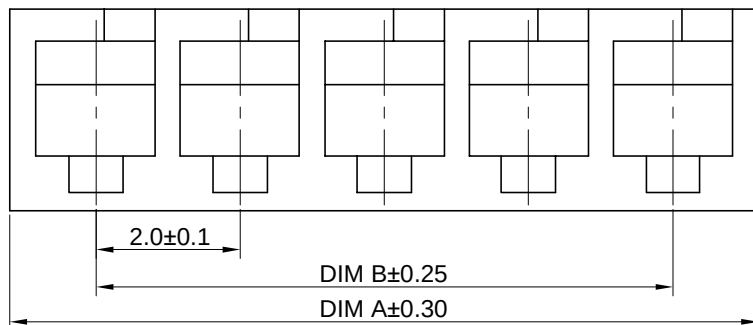

PCB LAYOUT

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2010HR-XP-X-HF

DRAWING NO.

C-FU2010HR-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.00mm Pitch Board In Housing

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE