

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

- Specifications:
- 1.Current rating:2A AC,DC
 - 2.Voltage rating:125V AC,DC
 - 3.Temperature range:-40°C~+105°C
 - 4.Contact resistance:10mΩMax.
 - 5.Insulation resistance:1000MΩMin.
 - 6.Withstanding voltage:1000V AC/minute
 - 7.Material:PA66 UL94V-0
 - Contact:Ø0.6mm Brass,Tin-Plated
 - 8.Bill Of Part No.:

FU2006WR-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions


PIN	DIM(MM)		PIN	DIM(MM)	
	A	B		A	B
2	6.00	2.00	9	20.00	16.00
3	8.00	4.00	10	22.00	18.00
4	10.00	6.00	11	24.00	20.00
5	12.00	8.00	12	26.00	22.00
6	14.00	10.00	13	28.00	24.00
7	16.00	12.00	14	30.00	26.00
8	18.00	14.00	15	32.00	28.00

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 2.0mm PITCH 90° WAFER

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2006WR-XP-HF

DRAWING NO.

C-FU2006WR-XP-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

A

B

C



D

A





B

C

D

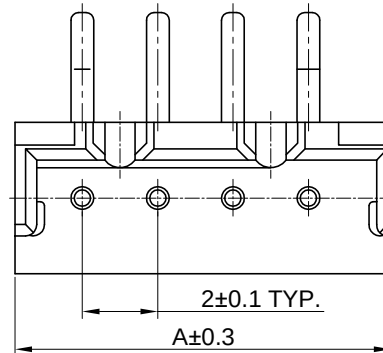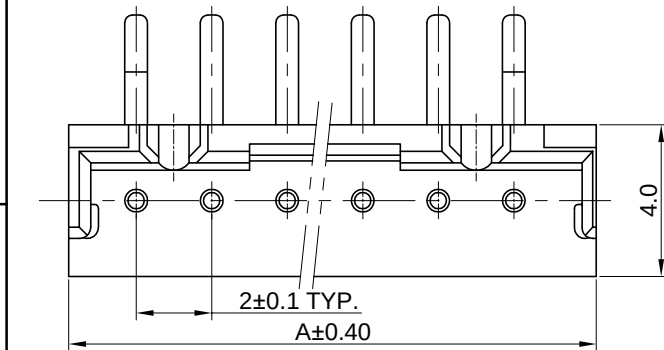

4P

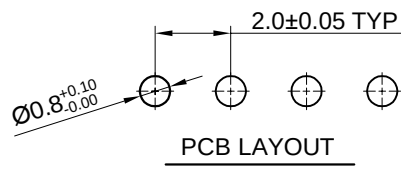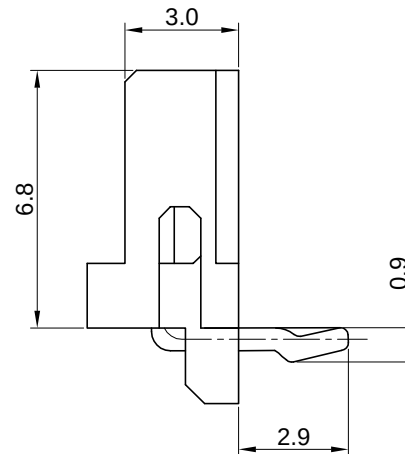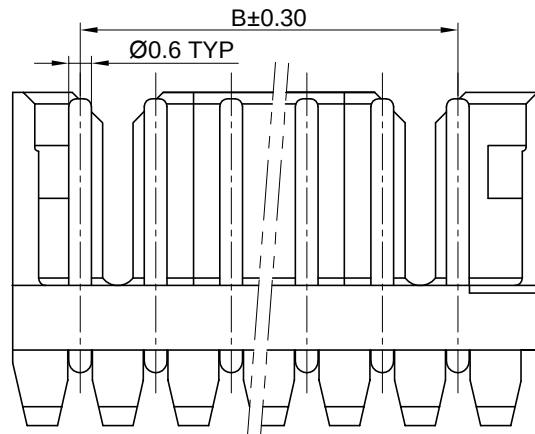

A		For New Drawing	GuobaoLi	2017.12.06
REV.	ECN NO	REVISION RECORD	DRAW	DATE

1

2

3

4

5

6 QMI-P12-05-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:







- 1.Current rating:2A AC,DC
- 2.Voltage rating:125V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1000V AC/minute
- 7.Material:PA66 UL94V-0
Contact:Ø0.6mm Brass,Tin-Plated
- 8.Bill Of Part No.:

FU2006WR-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions


Pin	Dim(mm)		Pin	Dim(mm)	
	A	B		A	B
2	6.0	2.0	9	20.0	16.0
3	8.0	4.0	10	22.0	18.0
4	10.0	6.0	11	24.0	20.0
5	12.0	8.0	12	26.0	22.0
6	14.0	10.0	13	28.0	24.0
7	16.0	12.0	14	30.0	26.0
8	18.0	14.0	15	32.0	28.0

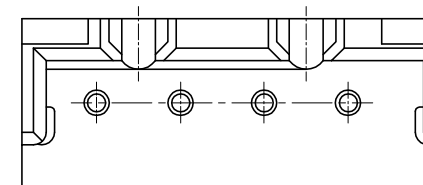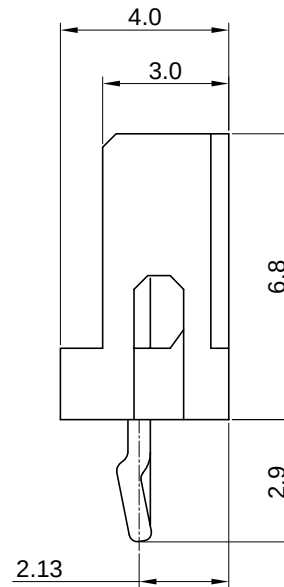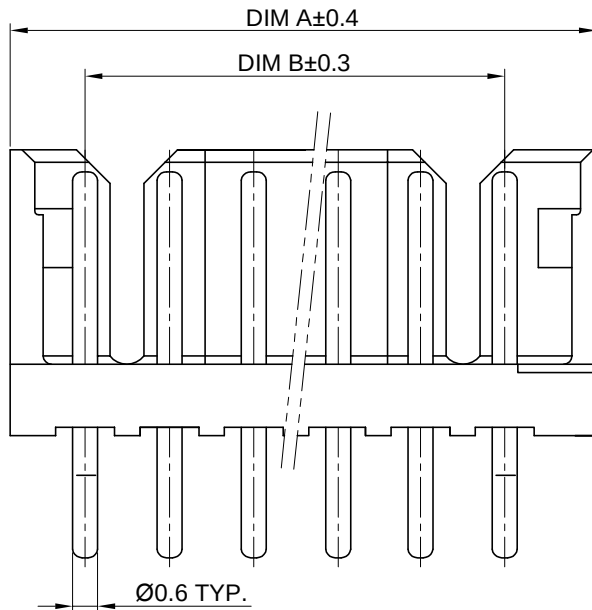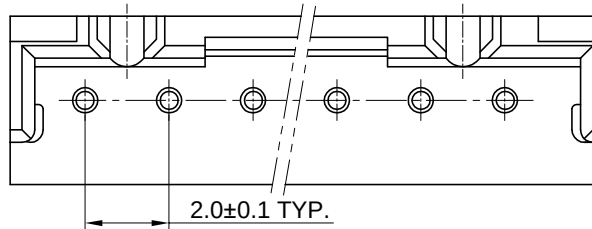

PCB LAYOUT

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2006WV-XP-HF

DRAWING NO.

C-FU2006WV-XP-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 2.0mm PITCH 180° WAFER

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.06.02

6 QMI-P12-05-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:2A AC,DC
 - 2.Voltage rating:125V AC,DC
 - 3.Temperature range:-40°C~+105°C
 - 4.Contact resistance:10mΩMax.
 - 5.Insulation resistance:1000MΩMin.
 - 6.Withstanding voltage:1000V AC/minute
 - 7.Material:PA66 UL94V-0
- Contact:Ø0.6mm Brass,Tin-Plated

8.Bill Of Part No.:





FU2006WR-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM(MM)		PIN	DIM(MM)	
	A	B		A	B
2	6.00	2.00	9	20.00	16.00
3	8.00	4.00	10	22.00	18.00
4	10.00	6.00	11	24.00	20.00
5	12.00	8.00	12	26.00	22.00
6	14.00	10.00	13	28.00	24.00
7	16.00	12.00	14	30.00	26.00
8	18.00	14.00	15	32.00	28.00

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD		
X.	X.XXX ±0.10	FU2006WVBS-XP-HF			
X.X±0.30		DRAWING NO.	TITLE. 2.0mm PITCH 180° WAFER		
X.XX±0.20	Angular ±2°				
	UNIT:	APPROVED BY	CHECKED BY	DRAWN BY	PAGE
	mm				1OF1
DWG TYPE.				SCALE	REV.
Customer Drawing				1: 1	A

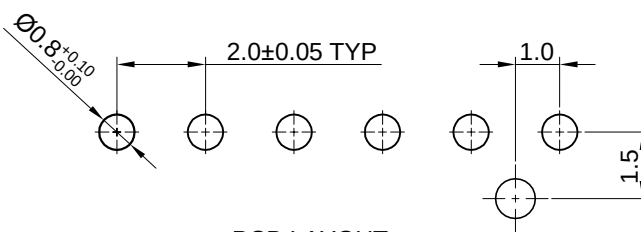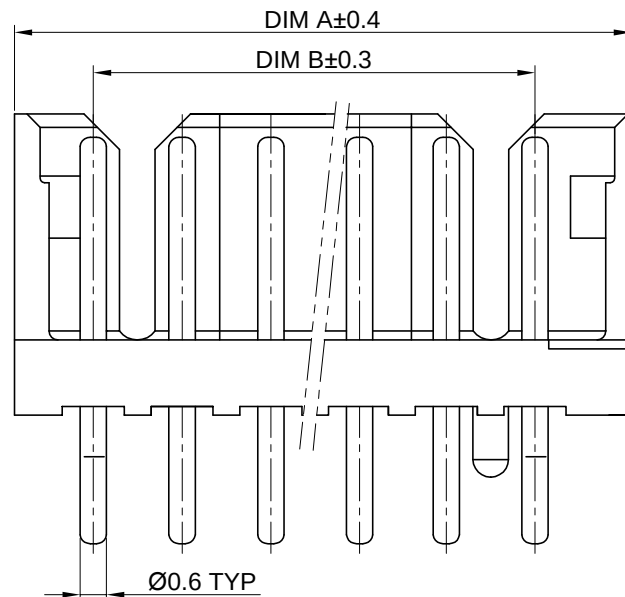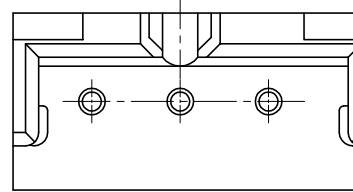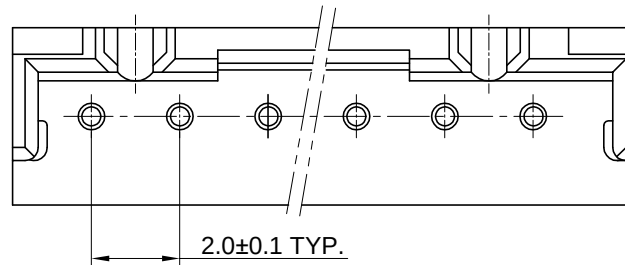

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.06.02