

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:





- 1.Current rating:5A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU3001H-AL2xXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green


9.Ordering Information & Dimensions

52.10	43.46	33.00	54.8	2x12
49.10	40.46	30.00	51.8	2x11
46.10	37.46	27.00	48.8	2x10
43.10	34.46	24.00	45.8	2x9
40.10	31.46	21.00	42.8	2x8
37.10	28.46	18.00	39.8	2x7
34.10	25.46	15.00	36.8	2x6
31.10	22.46	12.00	33.8	2x5
28.10	19.46	9.00	30.7	2x4
25.10	16.46	6.00	27.7	2x3
22.10	13.46	3.00	24.6	2x2
DIM D	DIM C	DIM B	DIM A	PIN

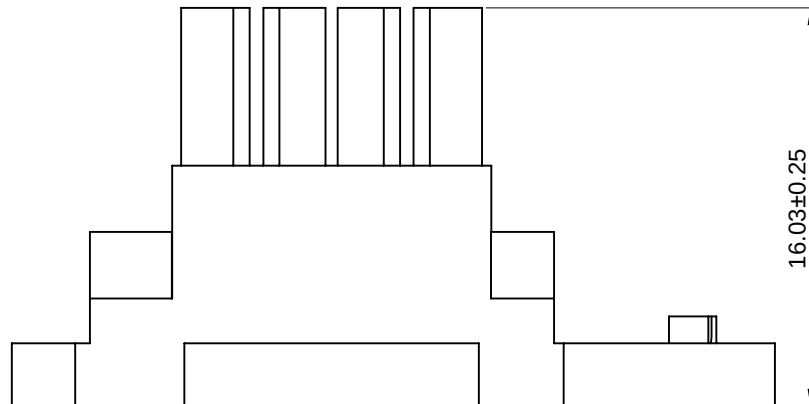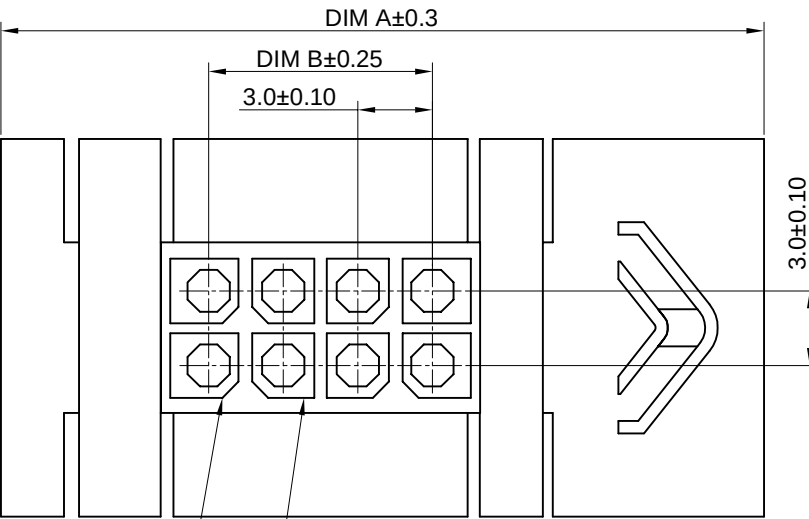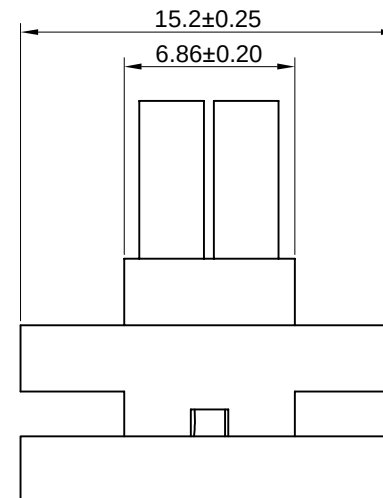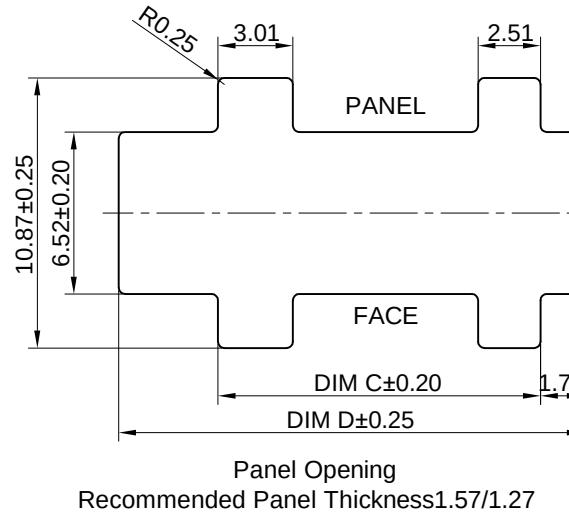

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU3001H-AL2xXP-X-HF

DRAWING NO.

C-FU3001H-AL2xXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE

1 OF 1

REV.

SCALE

5: 1

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE. Micro Fit 3.0mm Bim Floating
Panel Receptacle

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:5A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU3001H-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

			21.8	18.00	7
36.8	33.00	12	18.8	15.00	6
33.8	30.00	11	15.8	12.00	5
30.8	27.00	10	12.8	9.00	4
27.8	24.00	9	9.8	6.00	3
24.8	21.00	8	6.8	3.00	2
DIM B	DIM A	PIN	DIM B	DIM A	PIN

03P~12P

02P

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.
FU3001H-XP-X-HF

DRAWING NO.
C-FU3001H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.
3.00mm Pitch Wire To Wire Housing

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.22

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:5A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU3001H-2xXP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green

9.Ordering Information & Dimensions

36.85	33.00	2x12	18.85	15.00	2x6
33.85	30.00	2x11	15.85	12.00	2x5
30.85	27.00	2x10	12.85	9.00	2x4
27.85	24.00	2x9	9.85	6.00	2x3
24.85	21.00	2x8	6.85	3.00	2x2
21.85	18.00	2x7	3.85	---	2x1
DIM B	DIM A	PIN	DIM B	DIM A	PIN

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU3001H-2xXP-X-HF

DRAWING NO.

C-FU3001H-2xXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE



1 OF 1

REV.


SCALE

5: 1


A

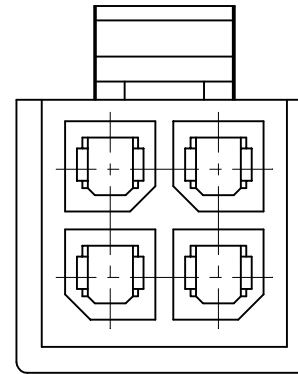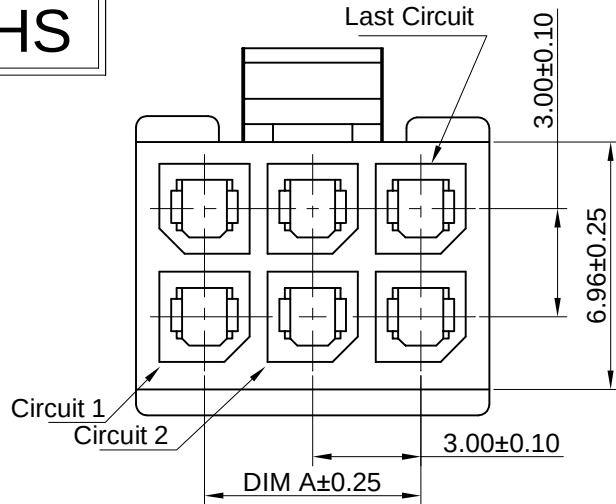


2x2PIN

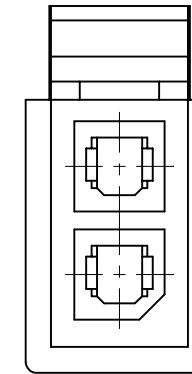

2x1PIN

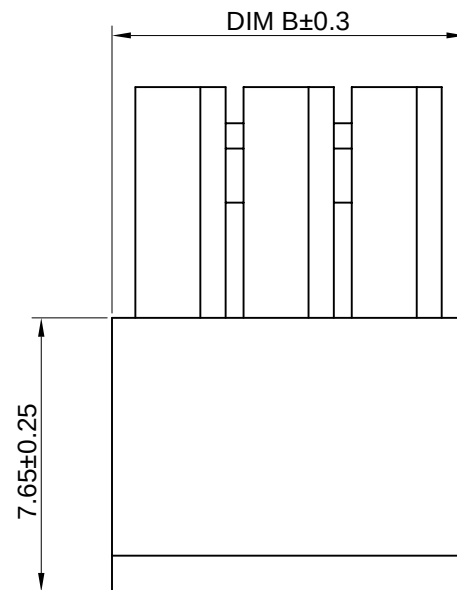

2X03P~2X12P

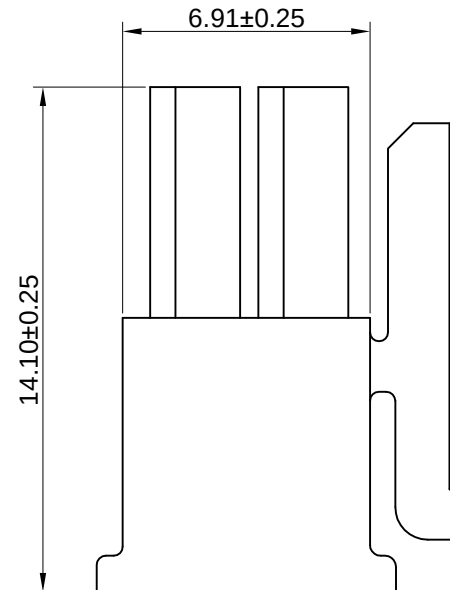

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.05