

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material: Nylon 9T UL 94V-0
Contact:SQ0.50mm Brass,Tin-Plated
Solder Tab:0.30mm Brass,Tin-Plated
- 8.Bill Of Part No.:





FU4001WRK-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Oranger
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.0	10.0
3	8.0	14.0
4	12.0	18.0
5	16.0	22.0

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD			
X.	X.XXX ±0.10	FU4001WRK-XP-X-HF	TITLE. 4.0mm Pitch 90° Wafer (Out Lock Type)			
X.X ±0.30						
X.XX ±0.20	Angular ±2°	DRAWING NO. C-FU4001WRK-XP-X-HF				
	UNIT: mm	APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1OF1	REV. A
		DWG TYPE. Customer Drawing		SCALE 1: 1		

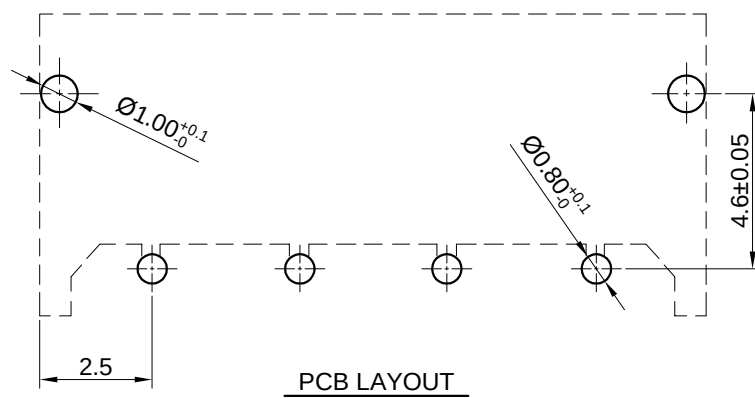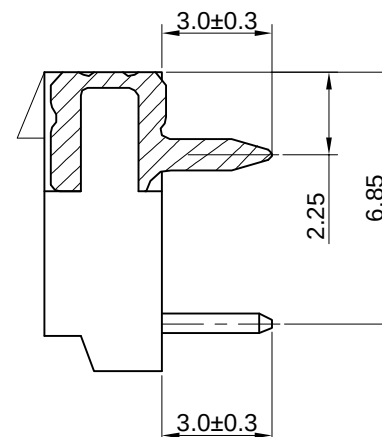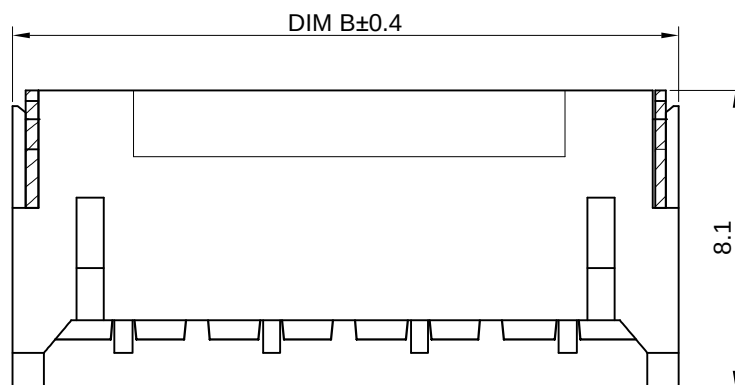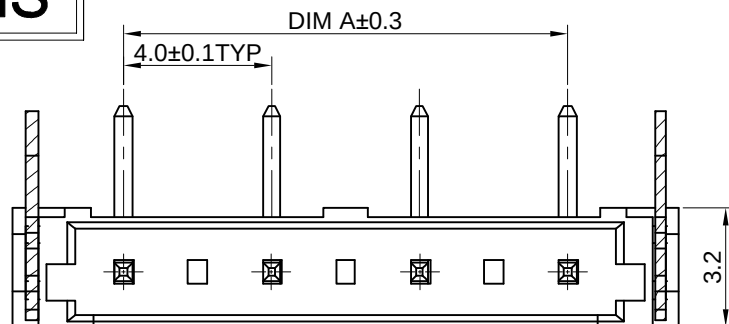

A		For New Drawing	GuobaoLi	2017.12.26
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material: Nylon 9T UL 94V-0

Contact:SQ0.50mm Brass,Tin-Plated

Solder Tab:0.30mm Brass,Tin-Plated

8.Bill Of Part No.:

FU4001WR-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.0	10.0
3	8.0	14.0
4	12.0	18.0
5	16.0	22.0

TOLERANCE

X.	X.XXX ±0.10
X.X±0.30	
X.XX±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001WR-XP-X-HF

DRAWING NO.

C-FU4001WR-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1OF1





SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch 90° Wafer

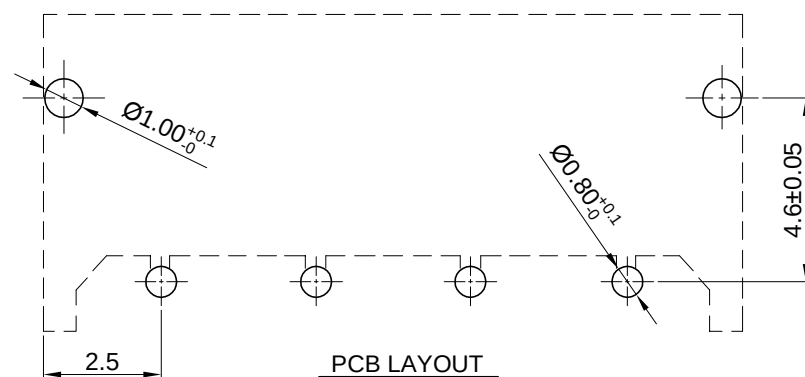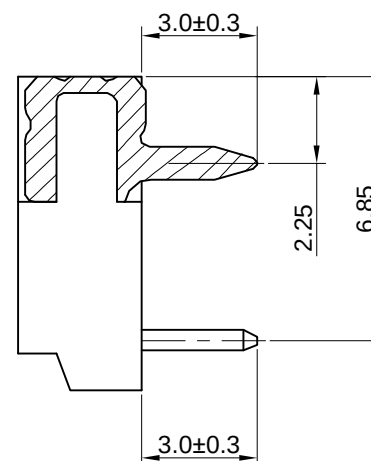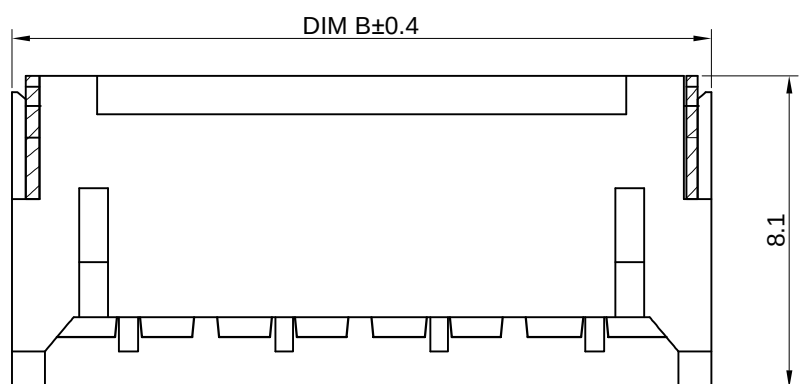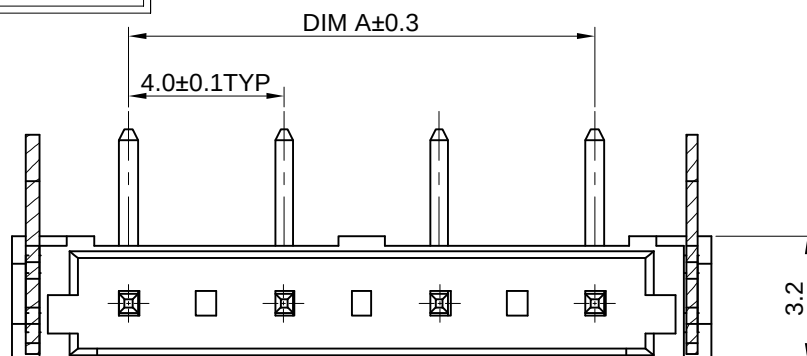

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.26

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material: Nylon 9T UL 94V-0
Contact:0.50mm Brass,Tin-Plated
Solder Tab:0.30mm Brass,Tin-Plated
- 8.Bill Of Part No.:
FU4001WRS-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.0	10.0
3	8.0	14.0
4	12.0	18.0
5	16.0	22.0

TOLERANCE

X.	X.XXX ±0.10
X.X±0.30	
X.XX±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001WRS-XP-X-HF

DRAWING NO.

C-FU4001WRS-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE 1OF1

REV.

SCALE 1: 1

A


东莞市福朗连接器制造有限公司

DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch 90° Wafer
(R-SMT Type)

PCB LAYOUT

A	For New Drawing	GuobaoLi	2017.12.26
REV.	ECN NO	REVISION RECORD	DATE

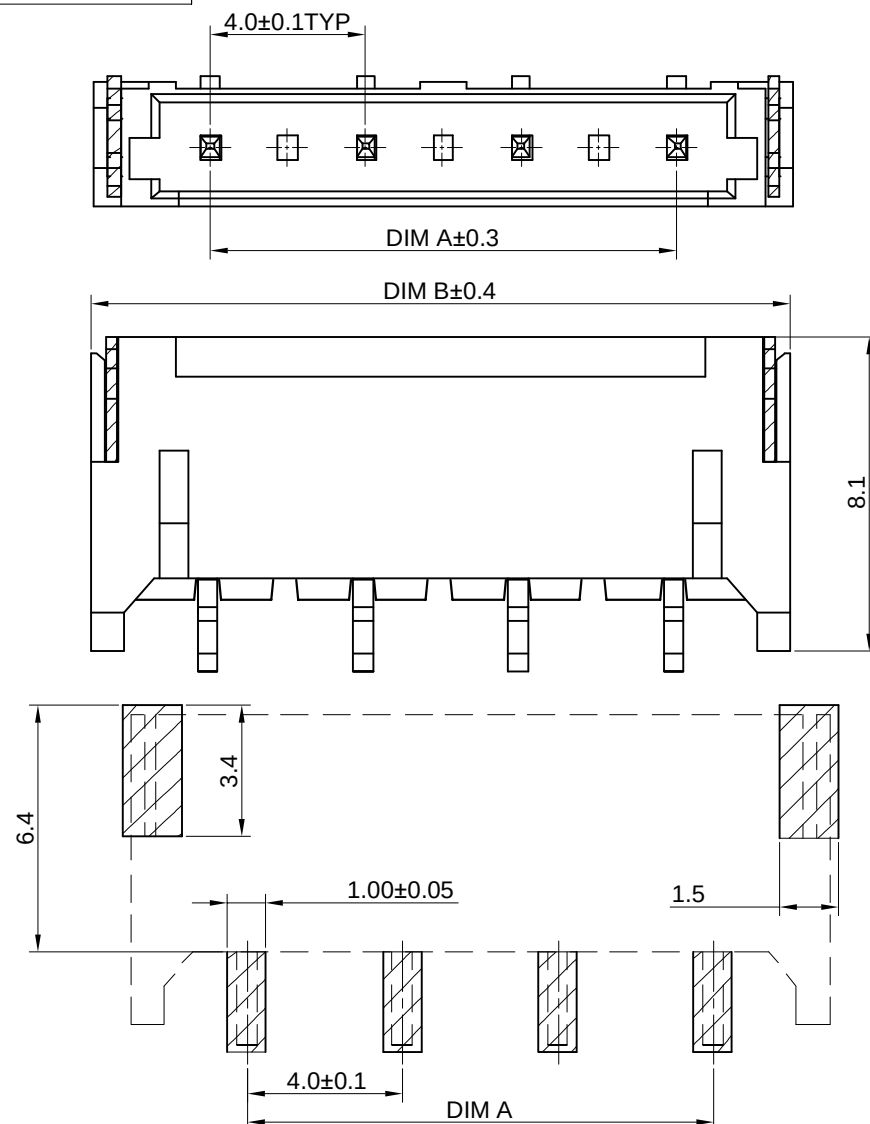

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material: Nylon 9T UL 94V-0
Contact:0.50mm Brass,Tin-Plated
Solder Tab:0.30mm Brass,Tin-Plated
- 8.Bill Of Part No.:
FU4001WRSK-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.0	10.0
3	8.0	14.0
4	12.0	18.0
5	16.0	22.0

TOLERANCE

X.	X.XXX ±0.10
X.X±0.30	
X.XX±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001WRSK-XP-X-HF

DRAWING NO.

C-FU4001WRSK-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1OF1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司

DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch 90° Wafer
(R-SMT Type)

PCB LAYOUT

A		For New Drawing	GuobaoLi	2017.12.26
REV.	ECN NO	REVISION RECORD	DRAW	DATE

1

2

3

4

5

6 QMI-P12-05-05