



RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:


- 1.Current rating:2A AC,DC
- 2.Voltage rating:125V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Spec. PLS. Refer To PS-FU2001,2002

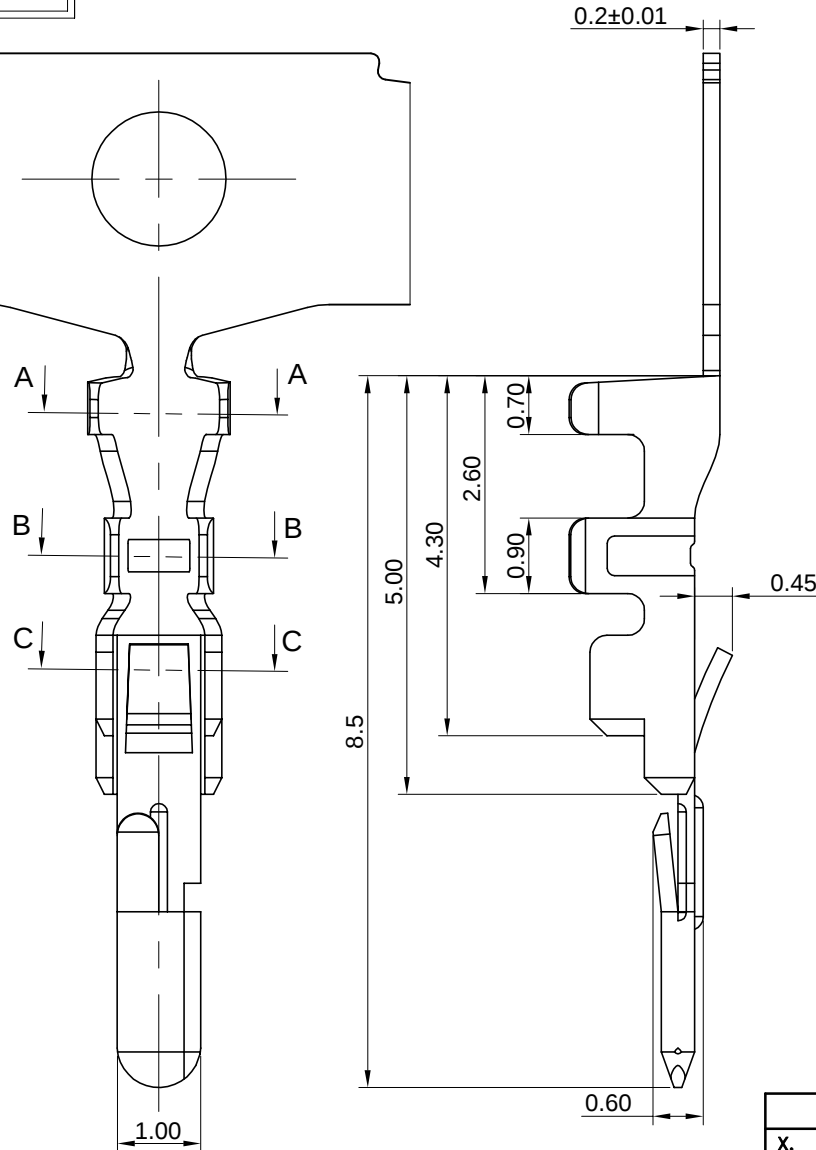

SEC:C-C



SEC:B-B



SEC:A-A

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU2001-T0P-B1	AWG#24~#28	1.15mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X. X.X ±0.30 X.XX ±0.20	X.XXX ±0.1 Angular ±2°	FU2001-T0P-B1	TITLE. 2.00mm Pitch Wire To Wire Pulg Terminal		
UNIT: mm		DRAWING NO. C-FU2001-T0P-B1			
DWG TYPE. Customer Drawing		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1 SCALE 5:1
					REV. A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.06

RoHS

CUST INFORMATION.




PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:


- 1.Current rating:2A AC,DC
- 2.Voltage rating:125V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Spec. PLS. Refer To PS-FU2001,2002

A
B
C
D


A
B
C
D

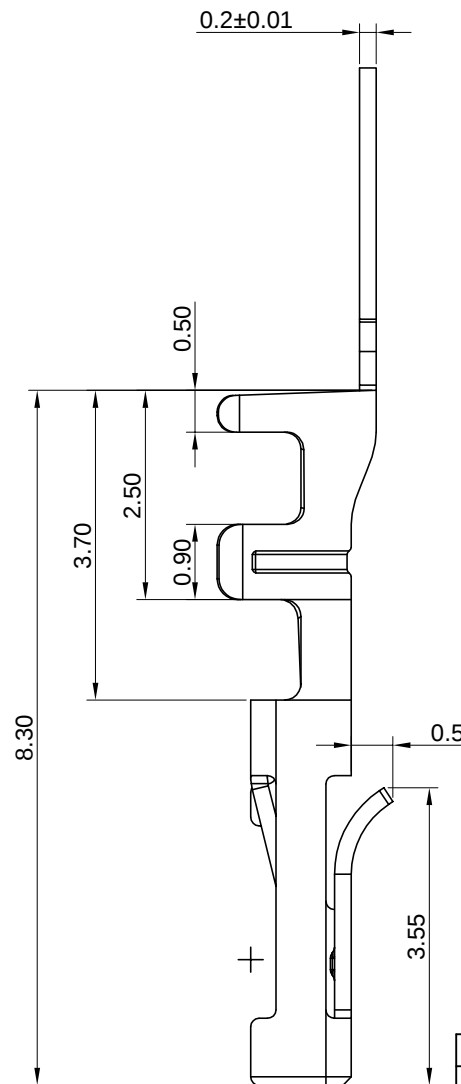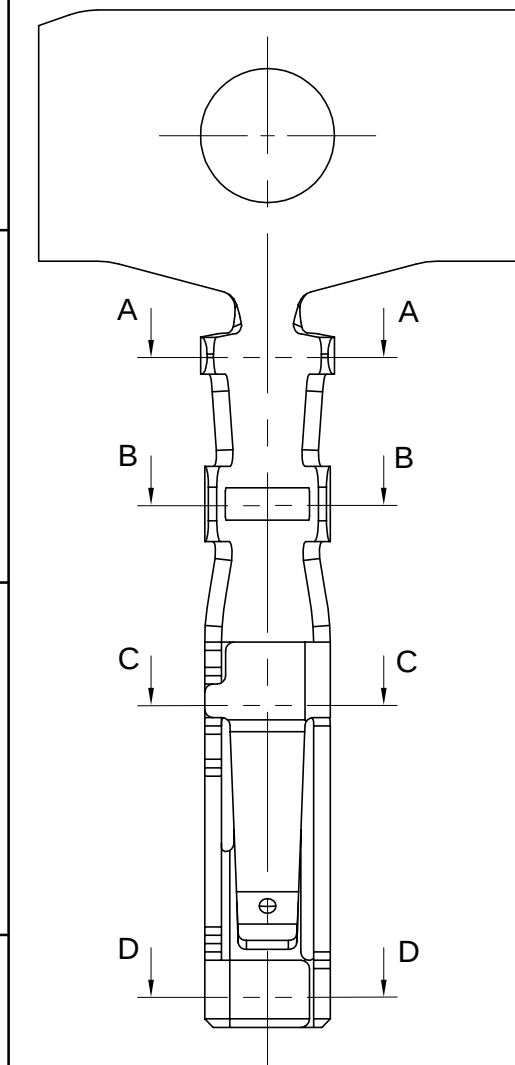


SEC:D-D



SEC:C-C



SEC:B-B




SEC:A-A

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU2002-T0P-B1	AWG#24~#28	1.15mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2002-T0P-B1

DRAWING NO.

C-FU2002-T0P-B1

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5:1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD
TITLE. 2.00mm Pitch Wire To Wire
Pulg Terminal

A		For New Drawing	GuobaoLi	2017.12.06
REV.	ECN NO	REVISION RECORD	DRAW	DATE