




RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:5A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Spec. PLS. Refer To PS-FU3001/3002

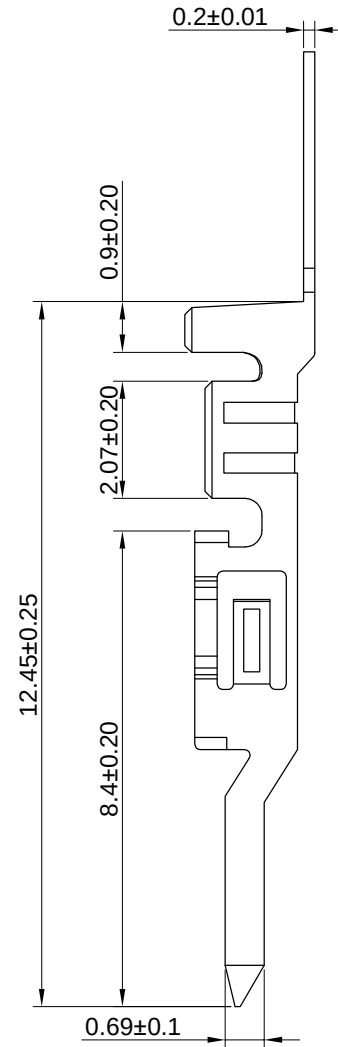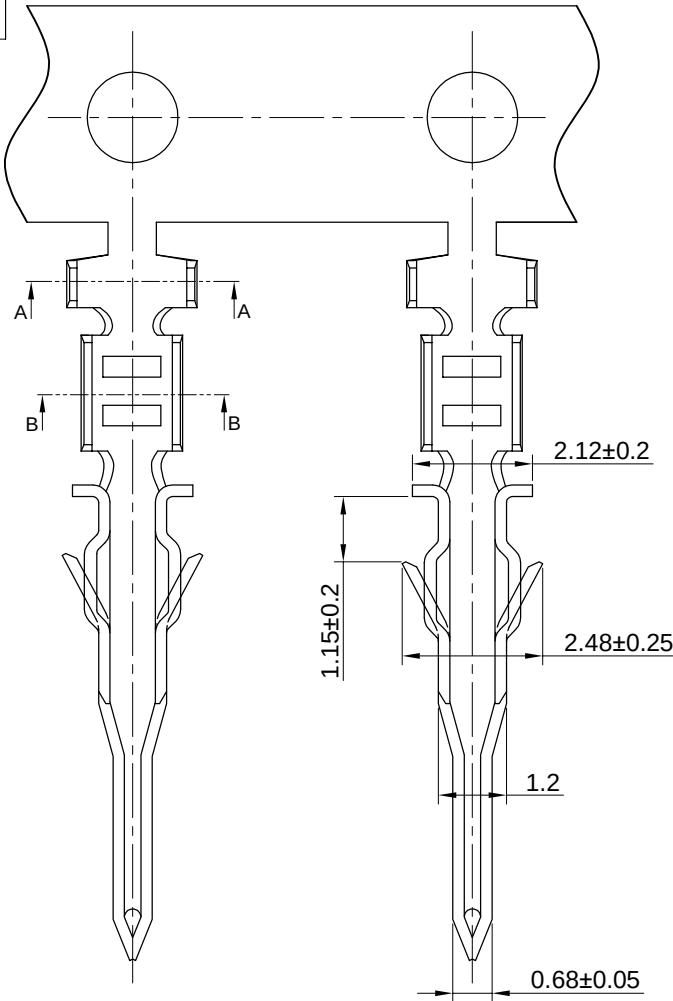

SEC:A-A



SEC:B-B

Part No.	A	B	C	D
FU3002-T0P-B1	2.54	2.30	2.08	1.90
FU3002-T1P-B1	2.10	1.90	1.65	1.46

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU3002-T0P-B1	AWG#20~#24	1.85mm Max	Phosphor Bronze	Tin over Nickel	10000Pcs
FU3002-T1P-B1	AWG#26~#30	1.27mm Max	Phosphor Bronze	Tin over Nickel	10000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X. X.XXX ±0.1		FU3002-TXP-B1			
X.X ±0.30					
X.XX ±0.20	Angular ±2°	DRAWING NO.	TITLE.		
		C-FU3002-TXP-B1	3.00mm Crimp Style Connectors		
UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
DWG TYPE.					SCALE 10:1
Customer Drawing					REV. A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.20