


WIRE TO BOARD SERIES

FU1201 1.20MM PITCH SERIES


Specifications:

- ◆ Rated Voltage: 50V AC,DC
- ◆ Rated Current: 2A AC,DC
- ◆ Withstand Voltage: 500V AC/minute
- ◆ Contact Resistance: 10mΩ Max.
- ◆ Insulation Resistance: 100MΩ Min.
- ◆ Temperature Range: -40℃~+105℃
- ◆ Applicable Wire Range: AWG #28~#32
- ◆ Insulation O.D.: 0.65mmMax
- ◆ UL: Recognized No. E496848


ITEM	PART NO.	MATERIAL	POLES	Q'TY/REEL
Terminal	FU1201-T0P-B2	Phosphor bronze		20000PCS
HSG	FU1201H-XP-X-HF	LCP UL 94V-0	01~05	7000PCS
Wafer	FU1201WVS-XP-XXX-HF	LCP UL 94V-0	01~05	300PCS

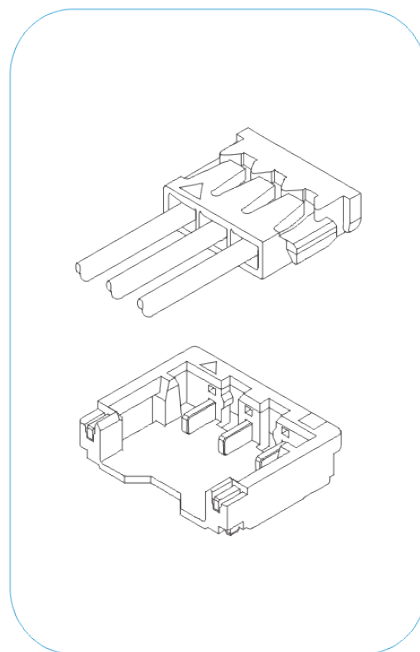


FU1201-T0P-B2



FU1201H-XP-X-HF



FU1201WVS-XP-XXX-HF



CONNECTOR PRODUCT NUMBER

Terminal Ordering Code

FU1201 T X X XX
① — ②③④ — ⑤

- ①: Series No.FU1201
②: Contact Terminal
③: Terminal Crimping Spec
0: Ordinary type
1: Low foot type
2: High foot type

- ④: Conductor Material Type
P: Phosphor Bronze
B: Brass
⑤: Conductor Surface Finish
B1: Bright-Sn
B2: Gold-Flash

HSG And Wafer Ordering Code

① ② ③ — ④ — ⑤ ⑥ — ⑦
FU1201 XX XX XXP X XX HF

- ③: Insulation Material Type
S: SMT Type
④: Total Number of Contacts
XXP: Single Row
⑤: Color
A: Black
B: Brown
C: Others
⑥: Conductor Surface Finish
B1: Bright-Sn
B2: Matte-Sn
B3: Gold-Flash
⑦: Halogen-free

- ①: Series No.FU1201
②: Conductor Type
H: Plastic Housing
WV: Vertical Wafer
WR: Right Angle Wafer